

**RESEARCH PAPER****Analysis of U-Shaped Slotted Microstrip Patch Antenna****Renuka Baban Singh**

P.G. Department of ECE, R.B.S. Engineering Technical Campus, Bichpuri, Agra

Email: renukasingh3@gmail.com**ABSTRACT**

In this work, the U-shaped slotted microstrip antenna is developed from a rectangular patch of the width (W) = 32mm and length (L) = 24mm. The proposed antenna is simulated using Sonnet software and the results compared with the conventional rectangular patch antenna. The results obtained shows that, bandwidth of conventional rectangular microstrip antenna can be enhanced from 4.81% (100MHz) to 28.71% (610 MHz) U- shaped patch over the substrate.

Key words: bandwidth, dielectric constant, microstrip antenna, slotted patch, substrate

Received: 8th May 2017, Revised: 30th May 2017, Accepted: 6th June 2017

©2017 Council of Research & Sustainable Development, India

How to cite this article:

Singh R.B. (2017): Analysis of U-Shaped Slotted Microstrip Patch Antenna. AJMECS, Vol. 2[3]: July, 2017: 54-60.

INTRODUCTION

Communication is defined as the transfer of information from one point to another. Communication between human beings was first done through voice. With the desire to increase the distance of communication, devices such as Drums, signal flags and smoke were used. These optical communication devices of course utilized the light part of the electromagnetic spectrum. More recently, in human history that the electromagnetic spectrum, outside the visible region has been employed for communication, through the use of Radio. One of the greatest human scientific evolutions is the emergence of electromagnetic spectrum and antenna has been instrumental in harnessing the resource. Through the years, microstrip antenna structures are most common option used to realize millimeter wave monolithic integrated circuits for microwave, radar and communication purposes. The shape and operating mode of the patch are selected, designs become very versatile in terms of operating frequency, polarization, pattern and impedance. Microstrip patch antenna consists of a radiating patch which is generally made of conducting material such as copper and can take any possible shape. The radiating patch and the feed lines are usually photo etched on the dielectric substrate which has a ground plate as shown in Fig. 1. In order to simplify analysis and performance prediction, the patch is generally square, rectangular, circular, triangular, and elliptical in shape.

For a rectangular patch, the length L of the patch is usually $0.333\lambda_0 < L < 0.5\lambda_0$, where λ_0 is the free space wavelength. The patch is selected to be very thin such that the patch thickness $t \ll \lambda_0$. The height h of the dielectric constant of the substrate (ϵ_r) is typically in the range $2.2 \leq \epsilon_r \leq 12$. The microstrip patch antennas radiate primarily because of the fringing fields between the patch edge and the ground plane. For good antenna performance, the choice of substrate used is an important factor. There are numerous substrates that can be used for the design of microstrip antennas within the dielectric constants range of $2.2 \leq \epsilon_r \leq 12$. The low dielectric constant ϵ_r is about 2.2 to 3, the

medium around 6.15 and the high approximately above 10.5. A thick dielectric substrate having a low dielectric constant is desirable since this provides better efficiency, larger bandwidth and better radiation. However, such a configuration leads to a larger antenna size. In order to design a compact microstrip patch antenna, substrate with higher dielectric constants must be used which are less efficient and result in narrower bandwidth. Hence a trade-off must be realized between the antenna dimensions and antenna performance.

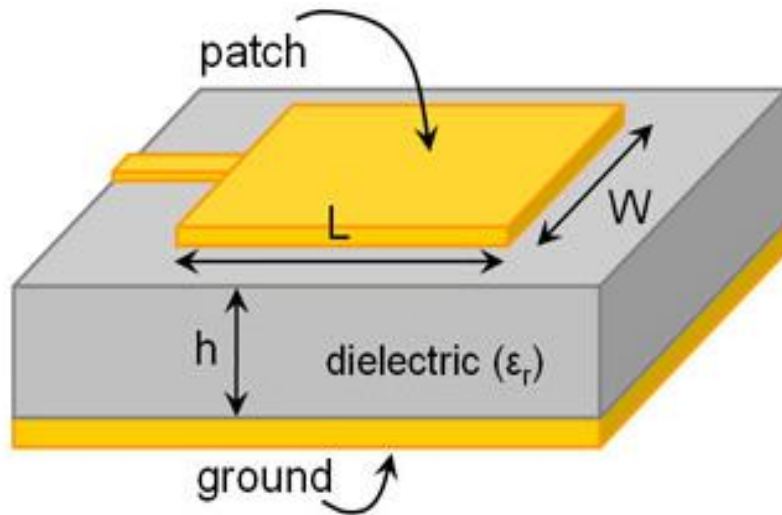


Fig. 1: Structure of a Microstrip Patch Antenna

DESIGN PARAMETERS

DESIGN EQUATIONS:

Resonance Frequency:

The resonance frequency depends on the patch size, cavity dimensions, and the filling material dielectric constant. It is expressed as follows;

$$f_{mn} = \frac{K_{mn}c}{2\pi\sqrt{\epsilon_r}}$$

Where $m, n = 0, 1, 2, \dots$ K_{mn} = wave number at m, n mode, c is the velocity of light, ϵ_r is the dielectric constant of the substrate, and

$$K_{mn} = \sqrt{\left(\frac{m\pi}{W}\right)^2 + \left(\frac{n\pi}{L}\right)^2}$$

Length and width of non radiating rectangular patch's edge at a certain resonance frequency and dielectric constant are given by:

$$L = \frac{c}{2f_r\sqrt{\epsilon_r}}$$

and

$$W = \frac{c}{f_r} \sqrt{\frac{2}{\epsilon_r + 1}}$$

Where f_r is the resonance frequency at which the rectangular microstrip antenna is to be designed. The radiating edge W , patch width is usually kept such that it lies within

the range $L < W < 2L$ for efficient radiation.

The ratio $W/L = 1.5$ gives good performance according to the side lobe appearances.

By using the above equations we can find the values of actual length of the patch as:

$$L = \frac{c}{2f_r \sqrt{\epsilon_{eff}}} - 2\Delta l$$

where ϵ_{eff} is the effective dielectric constant and Δl is the line extension which is given as

$$\epsilon_{eff} = \left(\frac{\epsilon_r + 1}{2}\right) + \left(\frac{\epsilon_r - 1}{2}\right) \cdot \frac{1}{\sqrt{1 + 12 \frac{h}{W}}}$$

$$\frac{\Delta l}{h} = 0.412 \frac{(\epsilon_{eff} + 0.3) \left(\frac{W}{h} + 0.264\right)}{(\epsilon_{eff} - 0.258) \left(\frac{W}{h} + 0.8\right)}$$

Feeding Techniques:

Microstrip patch antennas can be fed by a variety of methods. These methods can be classified into two categories-contacting and non-contacting methods. The RF power is fed directly to the radiating patch using a connecting element such as a microstrip line. In the non-contacting scheme, electromagnetic field coupling is done to transfer power between the microstrip line and the radiating patch. The four most popular feed techniques used are the microstrip line, coaxial probe, aperture coupling and proximity coupling.

METHOD OF ANALYSIS:

There are many methods of analysis for microstrip antenna. The most popular models are the transmission-line, cavity and full-wave. The transmission-line model is the easiest of all, it gives good insight and it is adequate for most engineering purposes and requires less computation. However, it is less accurate. The cavity model is more accurate and gives good physical insight but is complex. The full-wave models are very accurate, very versatile, and can treat single elements, finite and infinite arrays, stacked elements, arbitrary shaped elements and coupling. However, they are the most complex models and usually give less physical insight.

BANDWIDTH:

The limitation of the microstrip antenna is its narrow BW. The bandwidth could be defined in terms of its VSWR or input impedance variation with frequency or in terms of radiation parameters. For the circularly polarized antenna, bandwidth is defined in terms of the Axial Ratio. VSWR is a very popular parameter for determining the bandwidth of a particular antenna configuration ($1 \leq \text{VSWR} \leq 2$) as an acceptable interval for determining the bandwidth of the antenna. Bandwidth is presented more concisely as a percent where,

$$\% \text{ BW} = \frac{\Delta f}{f_0} \times 100$$

Where Δf is the width of the range of acceptable frequencies, and f_0 is the resonant frequency of the antenna. The expressions for approximately calculating the percentage BW of the (RMSA) antenna in terms of patch dimensions and substrate parameters, is given by-

$$\% \text{ BW} = \frac{A * h}{2.0 \sqrt{\epsilon_r} \sqrt{l}}$$

Where A is constant and can take the values 180, 200 and 220.

For A = 180

$$\frac{h}{\lambda_0 \sqrt{\epsilon_r}} \leq 0.045$$

for A = 200

$$\frac{h}{\lambda_0 \sqrt{\epsilon_r}} \leq 0.075$$

for A = 220

$$\frac{h}{\lambda_0 \sqrt{\epsilon_r}} \leq 0.07$$

With an increase in W, bandwidth increases. However, W should be taken less than λ to avoid excitation of higher order modes. The BW of the MSA can also inversely proportional to its quality factor Q and is given by

$$BW = \frac{VSWR - 1}{Q \sqrt{VSWR}}$$

The BW is usually specified as frequency range over which $VSWR \leq 2$. However, in recent years considerable effort has been spent to improve the bandwidth of the microstrip antenna, in part by using alternative feeding schemes.

RETURN LOSS:

The return loss is another way of expressing mismatch. It is a logarithmic ratio measured in dB that compares the power reflected by the antenna to the power that is fed into the antenna from the transmission line. The relationship between VSWR and return loss is as follows-

$$\text{Return loss in dB} = 20 \log_{10} \left(\frac{VSWR}{VSWR - 1} \right)$$

ANTENNA DESIGN AND ANALYSIS

In this paper several parameters of Rectangular Microstrip patch Antenna resonating at frequency 2GHz have been investigated. The geometry of patch antenna is shown in fig. 1. The design specifications for patch antenna are:

1. Substrate permittivity (ϵ_r) = 9.4
2. Substrate thickness (h) = 2 mm.
3. Length of patch (L) = 24 mm.
4. Width of patch (W) = 32 mm.

The proposed antenna is to operate in the frequency range from 1GHz to 3GHz. The dielectric constant is kept high in order to get a reduced antenna size. The objective is to get an improved bandwidth from the conventional rectangular patch since the higher dielectric substrate results in size reduction at the expense of bandwidth reduction.

In this design, we have proposed U-shape from a patch of width (W) = 32mm and length (L) = 24mm. The proposed antenna is simulated using Sonnet software, under the same conditions and results compared with the conventional rectangular patch antenna, and the shape with improved bandwidth is adopted, and implemented. The bandwidth was obtained where return loss is less than - 10dB which is an acceptable level to describe the loss of the power which reflects back from the antenna without being radiated.

Fig. 2 shows the geometry of conventional rectangular microstrip antenna (RMSA). The antenna is designed for the resonance frequency of 2GHz. It consists of radiating patch of length L and width W.

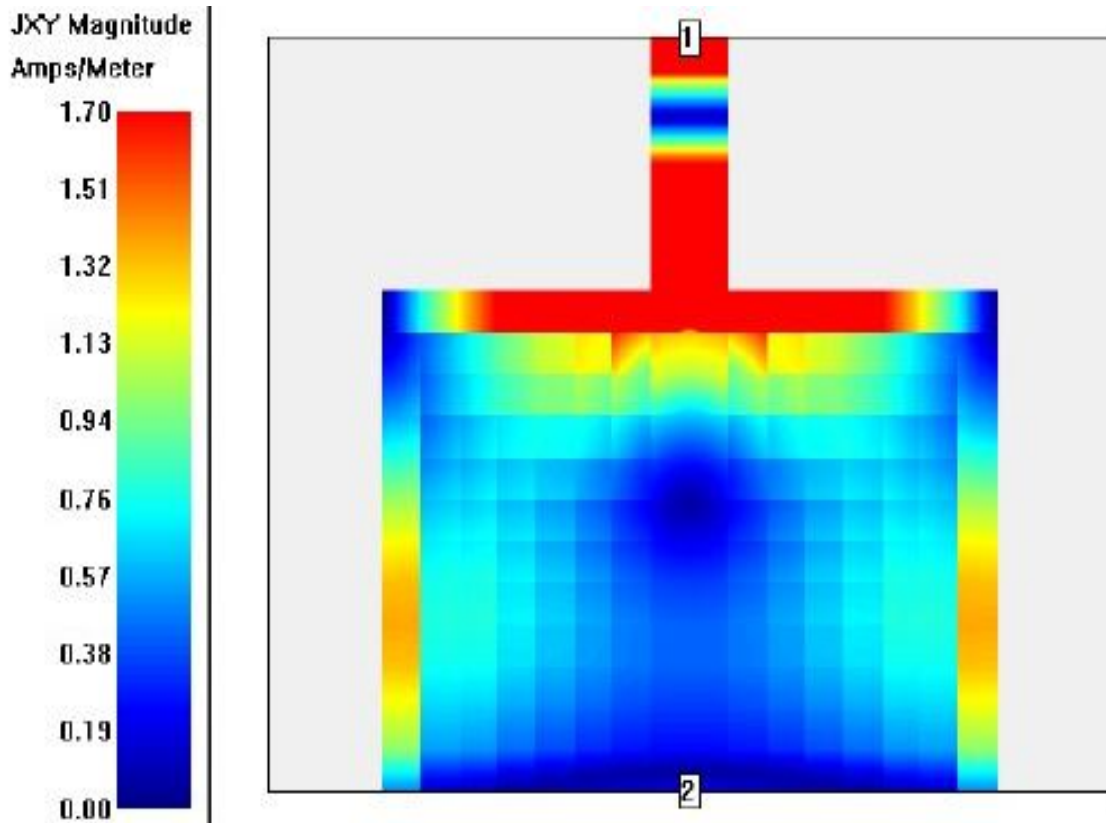


Fig. 2: Rectangular Patch shape with Current distribution and feed points

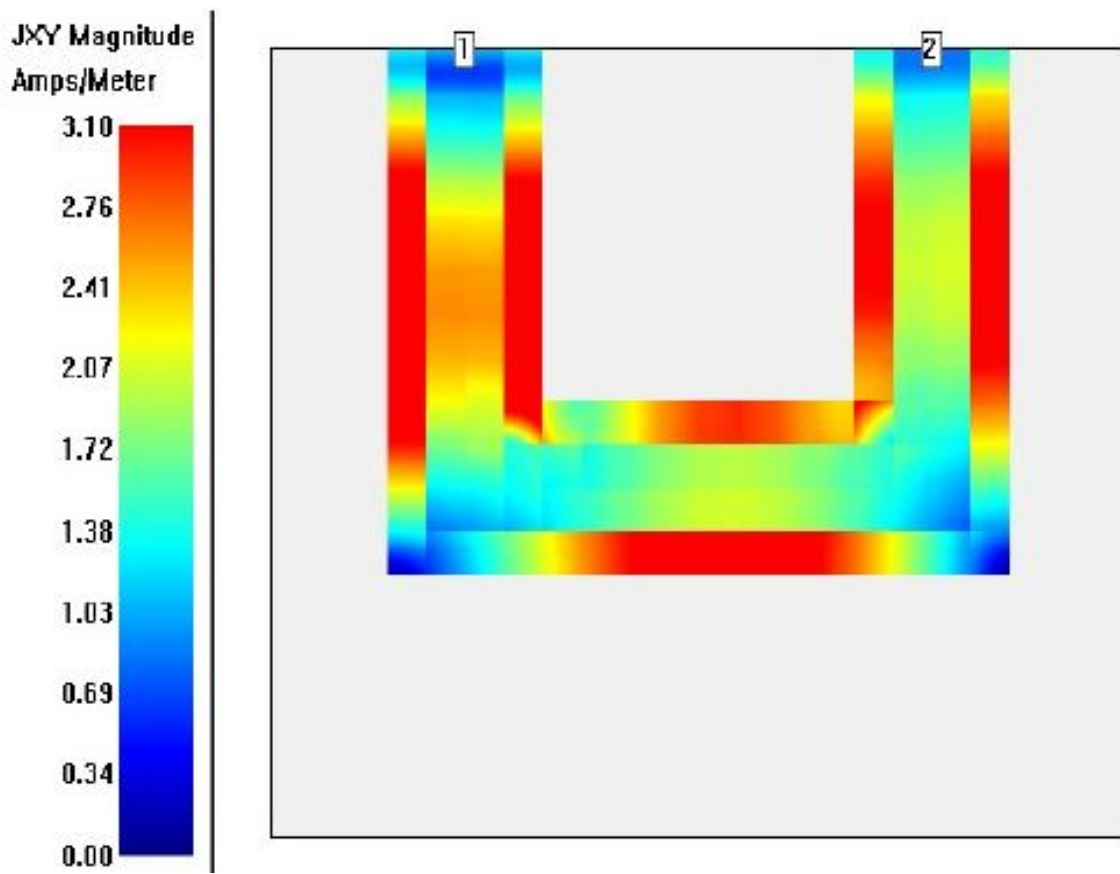


Fig. 3: U-Patch shaped with current distribution and feed points

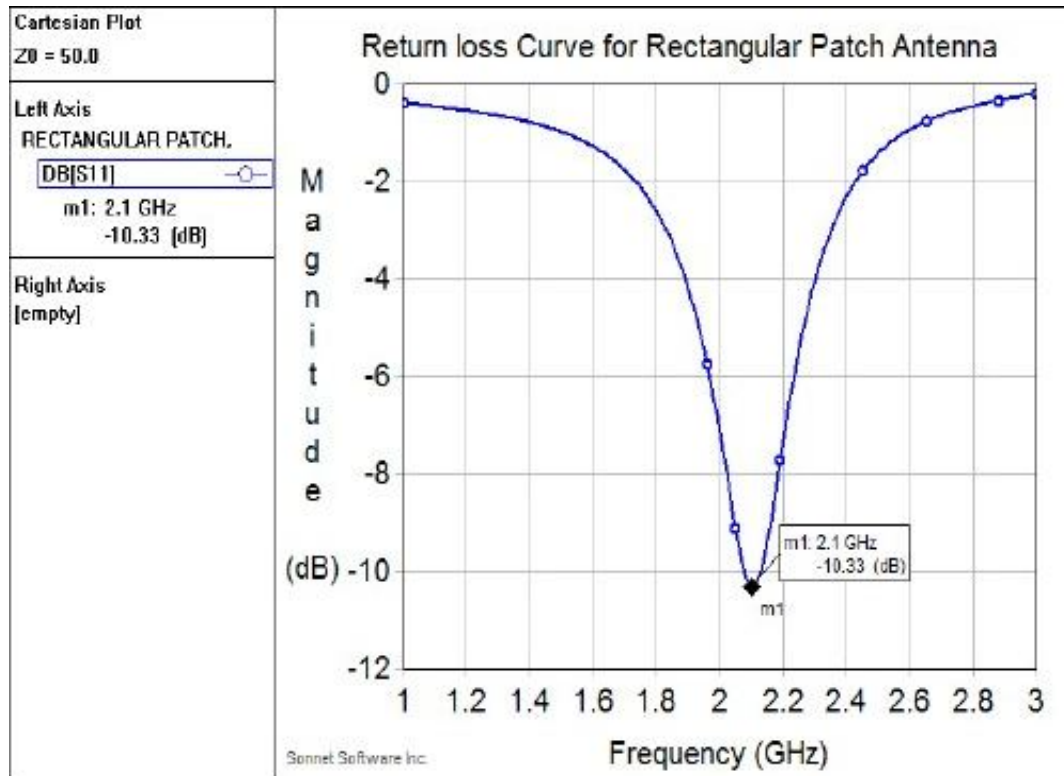


Fig. 4: Simulated Return Loss of rectangular microstrip patch antenna

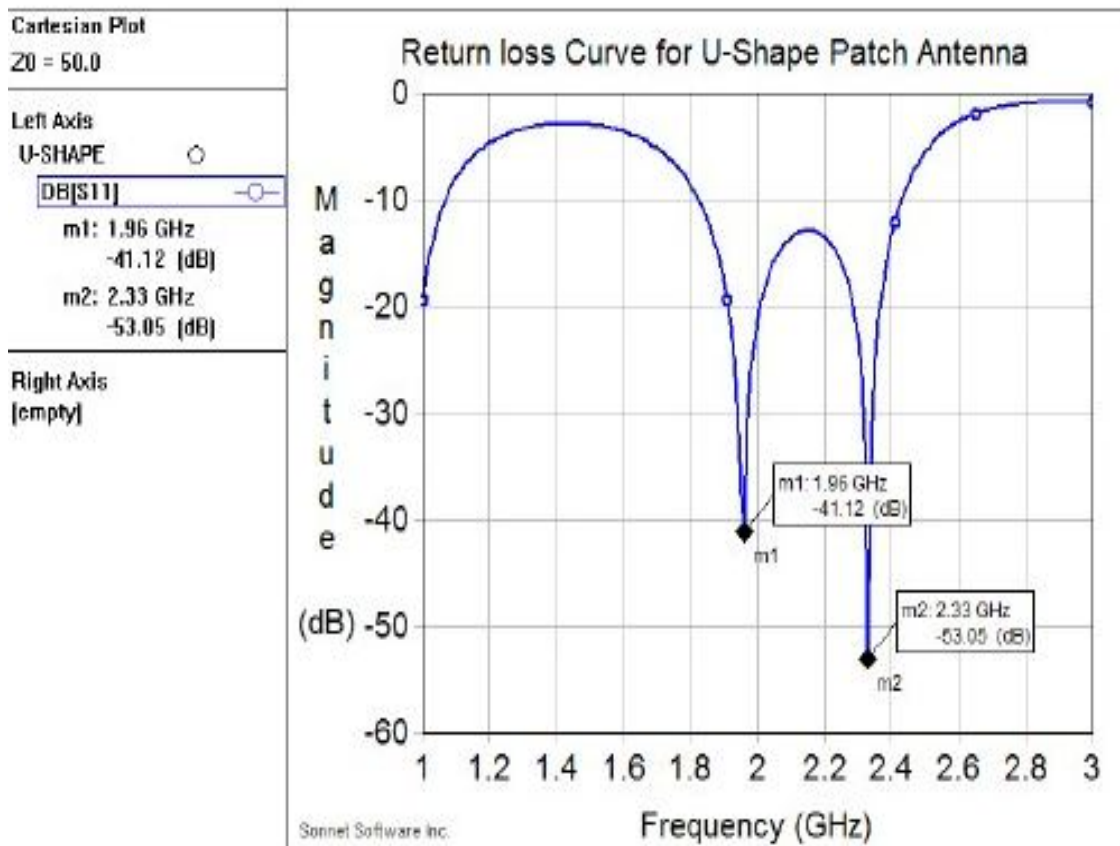


Fig. 5: U- Patch shape Antenna with Current distribution and feed points

SIMULATION RESULT

From the graph, the experimental bandwidth is calculated using the formula,

$$\% \text{ BW} = \frac{U_f - L_f}{C_f} \times 100$$

Where, U_f and L_f are upper and lower cut-off frequencies of the bandwidth respectively when its return loss reaches -10dB and C_f is the center frequency between U_f and L_f .

The percentage bandwidth of the conventional RMSA is found to be 4.81% with bandwidth of 100MHz. The expressions for approximately calculating the percentage bandwidth of the RMSA in terms of patch dimensions and substrate parameters is given

by-

$$\% \text{ BW} = \frac{A * h}{\lambda_0 \sqrt{\epsilon_r}} \sqrt{\frac{W}{L}}$$

Where, A is constant, which is found to be 180. The BW calculated as 4.52% which is not too far from experimental result. Figure 8, shows the variation of return loss versus frequency of U-shaped patch antenna. The antenna resonates at two bands of frequencies at 1.96GHz and 2.33GHz, due to the U-slots. The overall bandwidth is 28.71 (that 610MHz).

This clearly shows that slot can be either resonant or non-resonant. If it is resonant, the current along the edges of the slot introduces additional resonances near the patch resonance, adding them together causes enhancement in the bandwidth.

Figure 5 gives the highest bandwidth of 28.71% (610MHz) which is more than bandwidth of conventional RMSA. This further enhancement in bandwidth when compare to RMSA is as a result of insertion of slots used for the construction of U-shaped patches. The current along the edges of the slot induces an additional resonance, which adds to the fundamental resonance of the radiating element that helps to increase bandwidth.

CONCLUSION

In this work, the aim was targeted at improving the bandwidth of microstrip antennas constructed with dielectric material with higher dielectric constant. We have selected U-shaped patch antenna and the simulated results compare with the conventional microstrip patch antenna. The results obtained clearly show that bandwidth of conventional RMSA made with dielectric substrates having higher dielectric constants can be improved using U-shaped patch antenna. We have observed that U-shaped patch antenna have the higher bandwidth than conventional RMSA.

REFERENCES

1. Abdelaziz A.A. (2006): Bandwidth Enhancement of Microstrip Antenna. Department of Electronics and Communications Faculty of Engineering Misr University for Science and Technology.
2. Ajay Singh and S.C. Gupta (2012): Review and Survey of Broadband Microstrip Patch Antennas. Dehradun Institute of Technology, Dehradun (India).
3. C. Vishnu Vardhana Reddy and Rahul Rana (2009): Design of Linearly Polarized Rectangular Microstrip patch Antenna using IE3D/pso. Thesis. NIT Rourkela.
4. R. Garg, P. Bhartia, I. Bahl and A. Ittipiboon (1997): Microstrip Antenna Design Handbook Antennas, John Wiley, 1997.
5. Rajesh Kumar Vishwakarma and Sanjay Tiwari (2010): Experimental Study of Stacked Rectangular Microstrip Antenna for Dual-Band. School of Studies in Electronics, Pt. Ravishankar Shukla University, Raipur, Chhattisgarh.
6. Ray K.P. (2003): Broadband Microstrip Antennas. Artech House antennas and propagation library, 2003.
7. Roshni Chaudhari, Samreen and S.B. Khant (2013): Bandwidth Enhancement with Proximity Coupled Stacked Circular Patch Configuration with Defected Ground Structures for WLAN Applications. Electronics and Communication Department, A.D.Patel Institute of Technology, Gujarat.